

3-Channel Fiber Array for COSA

Capillary-Type


Application : Silicon Photonics end coupling

Available for reflow soldering : $> 260^{\circ}\text{C}$

High accuracy of fiber spacing : $250 \pm 0.5\mu\text{m}$

MFD converted from $10\mu\text{m}$ to $3.5\mu\text{m}$

E/R : $< -20\text{dB}$

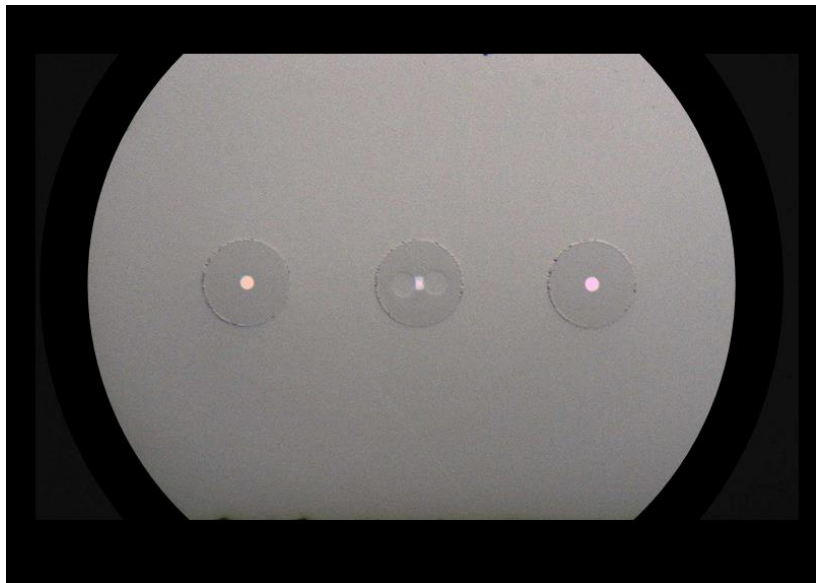

Core pitch:
 $250 \pm 0.5\mu\text{m}$

Nakahara Opto-Electronics Labs., Inc.

4282-3, Sakado, Mito, Ibaraki 310-0841 Japan

Contact : info@noel-sekiei.co.jp

NOEL

© 2023 NOEL